

A19

Industrial Thermostat (Watertight and Dusttight)

Description

This is a wide range temperature control with rainproof enclosure, SPDT switch, and 5 F° fixed differential.

Features

- rugged steel enclosure
- liquid filled sensing element (provides uniform control)

Applications

Use for refrigeration, air conditioning and heating applications that require a NEMA 4 watertight and dusttight enclosure.


Accessories

Order code number **WEL16A-600R** bulb well, if required.

Technical Specifications

Electrical Ratings

Motor Ratings VAC	120	208	240
AC Full Load A	16.0	9.2	8.0
AC Locked Rotor A	96.0	55.2	48.0
Non-Inductive or Resistance Load A (Not Lamp Loads)	16.0	9.2	8.0
Pilot Duty – 125 VA, 24 to 600 VAC			

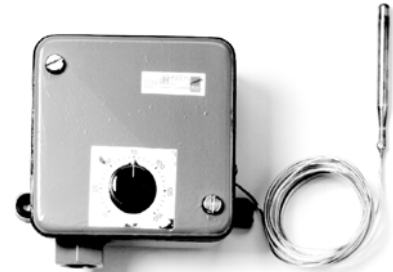

A19KNC-1

Selection Chart

Code Number	Switch Action	Range °F (°C)	Diff F° (C°)	Bulb and Capillary	Bulb Well No. (order separately)	Range Adjuster
A19KNC-1C	SPDT	0 to 150 (-15 to 65)	5 (2.8) Fixed	0.290 x 2 1/2 in. 10 ft. Cap.	WEL16A-600R	Knob